


XT66

Performance Plus

Tilt & Turn Window System



The AMS XT66 Performance Plus tilt & turn window system offers the same patented thermal break technology as the existing XT66, but also incorporates upgraded features that increase performance and reliability. Thermal performance, weather tightness and sound transmission characteristics have been enhanced with the introduction of a new gasketing system that has been developed to improve the efficiency of fabrication and installation, resulting in a marked increase in performance and durability. The XT66 Performance Plus tilt & turn window system window system allows for faster glazing installation with reduced labour costs and installation deficiencies.

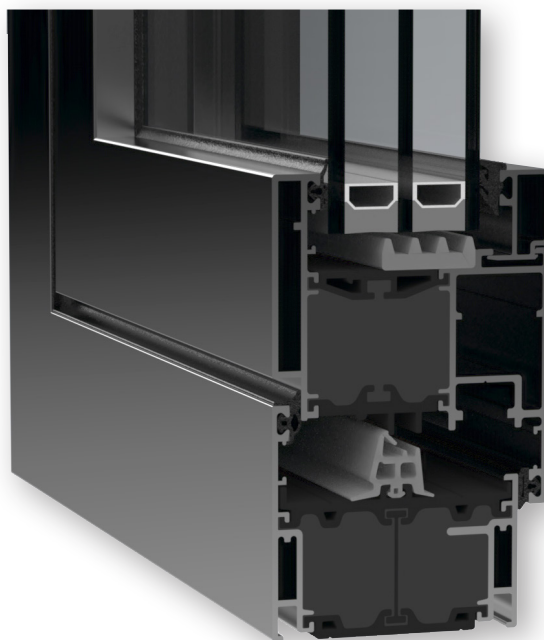

XT66

Performance Plus Tilt & Turn Window System

Measuring 66mm in depth, the XT66 Performance Plus suite of profiles has a range of equal and unequal leg sections to accommodate all anticipated framing options. The system can be glazed with double & triple glazed units from 28mm through to 48mm.

The XT66 Performance Plus tilt & turn window system has been fully tested per IS EN 14351-1:2006+A2:2016 and security tested to PAS 24:2016.


U-VALUE TABLE

Window U-values as low as 0.81 W/m²K can be achieved depending on glass design and are based on a window dimension of 1230mm x 1480mm with a full sash. U-values in the following table are calculated in accordance with IS EN 10077-1:2017 & LC:2020 and IS EN ISO 10077-2:2017. Profiles used in the calculation are the XTP6 202 frame and XTP6 910 sash.


GLASS U-VALUE (W/m ² K)	1.2	1.0	0.6	0.5
XT66 Performance Plus Tilt & Turn	1.30	1.17	0.88	0.81



XTP6910

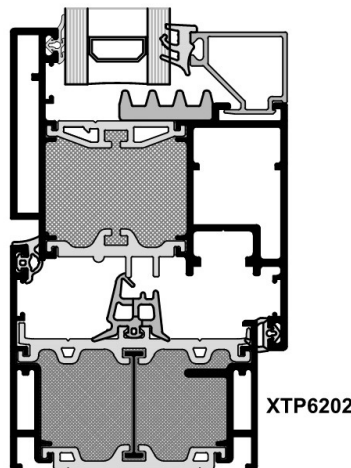

XTP6202

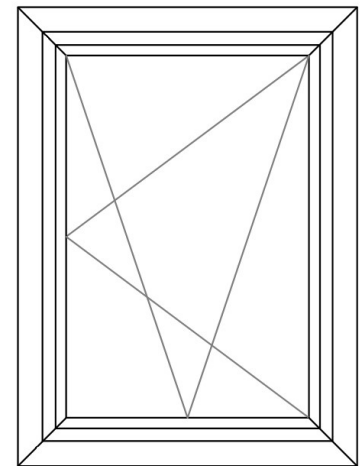

SYSTEM PERFORMANCE

- Air Classification – A4: 600 Pa.
- Water Tightness – E1050: 1050 Pa.
- Wind Resistance – E2400: 2400 Pa.
- Security – PAS24:2016.

FEATURES & FINISHES

- Opening options: tilt only & tilt and turn.
- Finishes included: single / twin colour, Decoral wood finishes and anodised options.
- Internally beaded throughout.
- Can accommodate units up to 48mm in thickness.
- Patented thermal break technology.
- CENSolutions Gold standard certification.
- Secured by Design certified.
- Can accommodate sashes up to 3.0m high.

Wallingstown, Little Island, Cork, Ireland. **T** +353 21 4705100 **E** info@ams.ie **www.ams.ie**

